
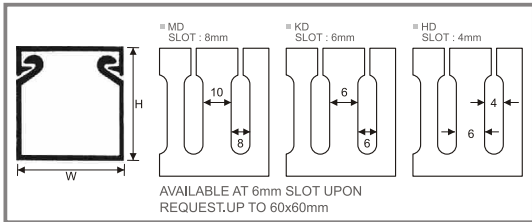




# WIRING DUCT (OPEN SLOT)

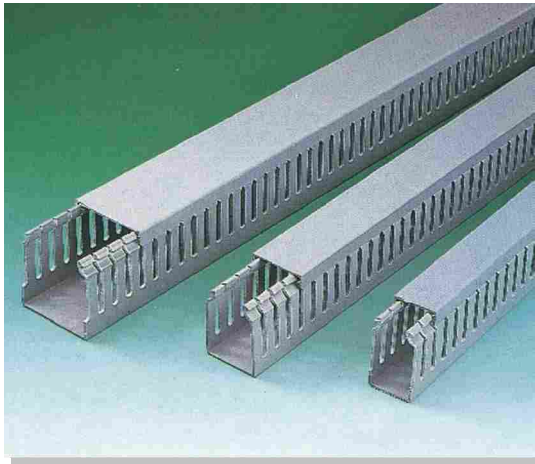

**SLOT:** 8mm for all applicable size except MD-6.5L, MD-6.7L, MD-8L in 10mm. (100mm in high)

- Material: High impact, self-extinguishing, warp-proof PVC(Polyvinyl chloride)
- Color: Gray.
- Maximum service temperature: 85°C.
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.

## FIXING SLOT

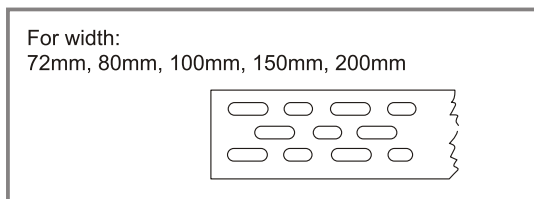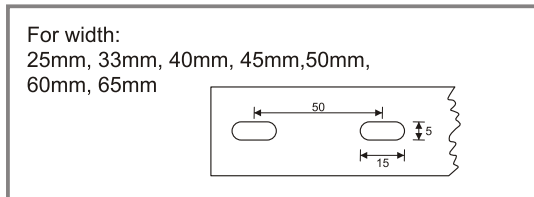

■ AVAILABLE AT 100mm SLOT UPON REQUEST.



Unit:mm

ITEM NO.			DIMENSION W x H	WIRES TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SLOT					
8mm	6mm	4mm			
MD-0.5L		HD-0.5L	15 x 25	5-12pcs	2M
MD-0.7L		HD-0.7L	20 x 20	5-12pcs	
MD-0L		HD-0L	25 x 25	10-25pcs	
MD-1L	KD-1L	HD-1L	25 x 45	20-25pcs	
MD-1.1L		HD-1.1L	30 x 30	15-25pcs	
MD-1.2L	KD-1.2L	HD-1.2L	33 x 33	25-45pcs	
MD-1.5L	KD-1.5L	HD-1.5L	33 x 45	40-55pcs	
MD-2L	KD-2L	HD-2L	45 x 45	60-70pcs	
MD-2.2L		HD-2.2L	50 x 50	80-90pcs	
MD-2.5L	KD-2.5L	HD-2.5L	65 x 45	110-120pcs	
MD-3L	KD-3L	HD-3L	33 x 65	60-75pcs	
MD-4L	KD-4L	HD-4L	25 x 65	40-45pcs	
MD-5L	KD-5L	HD-5L	45 x 65	110-120pcs	
MD-5.5L	KD-5.5L	HD-5.5L	60 x 60	120-135pcs	
MD-5.7L	KD-5.7L	HD-5.7L	65 x 65	180-200pcs	
MD-6L			72 x 64	200-220pcs	
MD-6.5L		HD-6.5L	33 x 100	180-200pcs	
MD-6.6L			37.5 x 100	180-200pcs	
MD-6.7L	KD-6.7L	HD-6.7L	48 x 100	215-250pcs	
MD-6.8L			55 x 100	220-260pcs	
MD-6.9L			75 x 75	200-250pcs	
MD-7L			70 x 100	250-300pcs	
MD-7.1L			75 x 100	260-320pcs	
MD-7.2L			100 x 50	200-250pcs	
MD-7.5L			100 x 75	260-320pcs	
MD-8L		HD-8L	100 x 100	300-400pcs	
MD-9L			120 x 75	280-380pcs	
MD-10L			150 x 75	335-500pcs	
MD-12L			150 x 100	450-600pcs	
MD-15L			200 x 100	600-800pcs	
MD-21L			200 x 150	1040-1200pcs	
MD-22L			200 x 200	1200-1600pcs	
MD-30L			300 x 100	1040-1200pcs	

Unit:mm

ITEM NO.			DIMENSION W x H	WIRES TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SLOT					
8mm	6mm	4mm			
VD-1		HVD-1	25 x 30	15-25pcs	2M
VD-1.5		HVD-1.5	30 x 30	15-25pcs	
VD-2		HVD-2	25 x 40	20-25pcs	
VD-3		HVD-3	33 x 40	40-45pcs	
VD-4	KVD-4	HVD-4	40 x 40	60-70pcs	
VD-5		HVD-5	60 x 40	100-115pcs	
VD-5.5		HVD-5.5	80 x 40	120-135pcs	
VD-5.7		HVD-5.7	100 x 40	130-175pcs	
VD-6		HVD-6	25 x 60	40-45pcs	
VD-7	KVD-7	HVD-7	40 x 60	100-115pcs	
VD-8	KVD-8	HVD-8	60 x 60	120-135pcs	
VD-9		HVD-9	80 x 60	180-210pcs	
VD-9.5		HVD-9.5	100 x 60	240-290pcs	
VD-9.6		HVD-9.6	120 x 60	240-290pcs	
VD-9.65		HVD-9.65	120 x 65	260-360pcs	
VD-9.66		HVD-9.66	25 x 80	100-120pcs	
VD-9.7		HVD-9.7	40 x 80	120-135pcs	
VD-9.8		HVD-9.8	60 x 80	180-210pcs	
VD-10		HVD-10	80 x 80	240-290pcs	
VD-10.5		HVD-10.5	100 x 80	260-350pcs	
VD-11		HVD-11	120 x 80	300-400pcs	
VD-12		HVD-12	40 x 100	130-175pcs	
VD-13		HVD-13	60 x 100	240-290pcs	
VD-14		HVD-14	80 x 100	260-350pcs	

## WIRING DUCT (CLOSE SLOT)

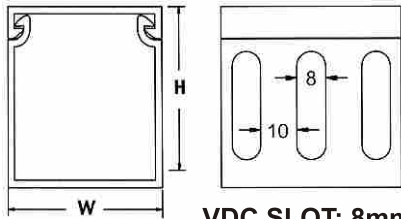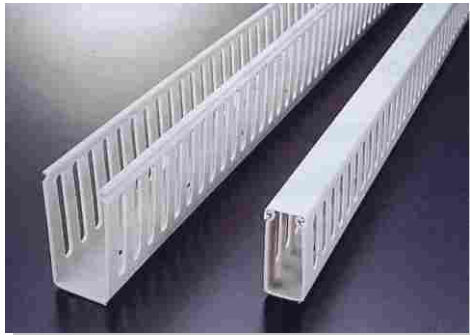



VDC SLOT: 8mm

ITEM NO.		W X H	WIRE TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SLOT: 8mm				
VDC-2530		25 x 30	15~25 pcs	2M
VDC-2560		25 x 60	40~45 pcs	
VDC-4040		40 x 40	60~70 pcs	
VDC-4060		40 x 60	100~115 pcs	
VDC-4080		40 x 80	120~135 pcs	
VDC-5050		50 x 50	80~90 pcs	
VDC-6060		60 x 60	120~135 pcs	
VDC-6080		60 x 80	180~210 pcs	
VDC-8080		80 x 80	240~290 pcs	
VDC-100100		100 x 100	300~400 pcs	

Unit:mm

- Color: Gray.
- Close slot design facilitate easy installation or removal of cover.
- Cut optionally wherever wire insertion/extension is necessary.

## WIRING DUCT (OPEN SLOT)

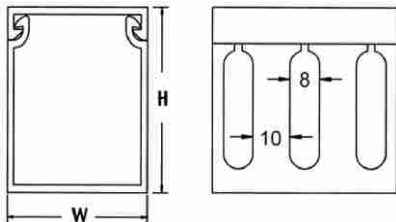
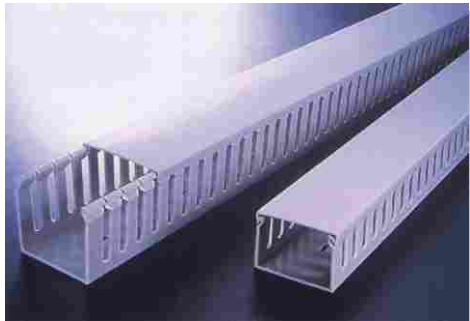


ITEM NO.		W X H	WIRE TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SLOT: 8mm	SOLID			
AD-1x2	SD-1x2	25 x 50	20~25 pcs	2M
AD-1x3	SD-1x3	25 x 75	60~75 pcs	
AD-1.5x1	SD-1.5x1	38 x 25	20~23 pcs	
AD-1.5x2	SD-1.5x2	38 x 50	60~70 pcs	
AD-2x2	SD-2x2	50 x 50	80~90 pcs	
AD-2x3	SD-2x3	50 x 75	180~200 pcs	
AD-3x2	SD-3x2	75 x 50	180~200 pcs	
AD-3x3	SD-3x3	75 x 75	200~250 pcs	
AD-3x4	SD-3x4	75 x 100	240~300 pcs	

Unit:mm

- Material: High impact. Self-extinguishing, warp-proof PVC
- Color: Gray.
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.

## WIRING DUCT (OPEN SLOT)

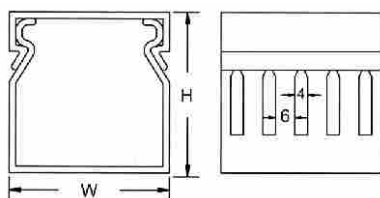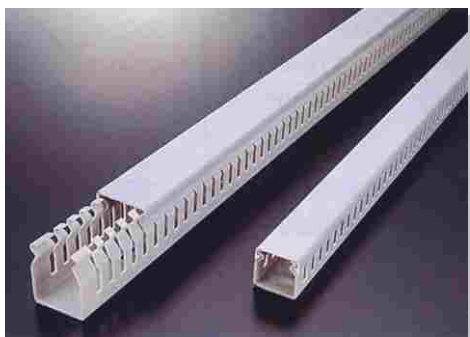



ITEM NO.		W X H	WIRE TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SLOT: 4mm				
BD-2525		25 x 25	10~25 pcs	2M
BD-3340		33 x 40	40~45 pcs	
BD-4040		40 x 40	50~60 pcs	
BD-3360		33 x 60	60~70 pcs	
BD-4860		48 x 60	110~120 pcs	
BD-6060		60 x 60	120~135 pcs	

Unit:mm

- Material: High impact. Self-extinguishing, warp-proof PVC
- Color: Gray.
- Maximum service temperature: 85°C
- Test to UL file E97527 up to 50°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.

# WIRING DUCT(SOLID)

Unit:mm

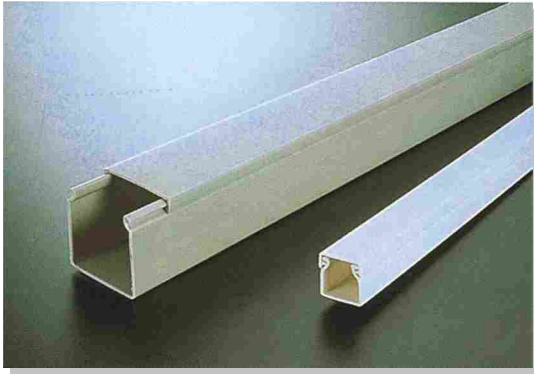

**SOLID:** No slot design, for external wiring or where wire extraction is not necessary.

- Material: High impact, self-extinguishing, warp-proof PVC.
- Color: Gray.
- Maximum service temperature: 85°C.
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.

ITEM NO.	W x H	WIRES TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SD-2210	22 x 10	3-8 pcs	2M
SD-3015	30 x 15	10-25 pcs	
SD-1616	16 x 16	3-10 pcs	
SD-2516	25 x 16	5-12 pcs	
SD-3816	38 x 16	12-30 pcs	
SD-2020	20 x 20	5-12 pcs	
SD-4020	40 x 20	20-40 pcs	
SD-1525	15 x 25	5-12 pcs	
SD-2525	25 x 25	10-25 pcs	
SD-3825	38 x 25	20-40 pcs	
SD-5025	50 x 25	25-45 pcs	
SD-2530	25 x 30	15-25 pcs	
SD-3030	30 x 30	20-40 pcs	
SD-3333	33 x 33	25-45 pcs	
SD-10030	100 x 30	130-160 pcs	
SD-10033	100 x 33	180-200 pcs	
SD-3838	38 x 38	45-50 pcs	
SD-2540	25 x 40	20-25 pcs	
SD-3340	33 x 40	40-45 pcs	
SD-4040	40 x 40	60-70 pcs	
SD-6040	60 x 40	100-115 pcs	
SD-7540	75 x 40	120-135 pcs	
SD-8040	80 x 40	120-135 pcs	
SD-10040	100 x 40	180-200 pcs	
SD-2545	25 x 45	20-25 pcs	
SD-3345	33 x 45	40-55 pcs	
SD-4545	45 x 45	60-70 pcs	
SD-6545	65 x 45	110-120 pcs	
SD-2550	25 x 50	20-30 pcs	
SD-3850	38 x 50	20-35 pcs	
SD-5050	50 x 50	80-90 pcs	
SD-7550	75 x 50	180-200 pcs	
SD-8050	80 x 50	180-200 pcs	
SD-10050	100 x 50	200-250 pcs	
SD-2560	25 x 60	40-45 pcs	
SD-4060	40 x 60	100-115 pcs	
SD-6060	60 x 60	120-135 pcs	
SD-8060	80 x 60	180-210 pcs	
SD-10060	100 x 60	240-290 pcs	
SD-12060	120 x 60	240-290 pcs	
SD-7264	72 x 64	200-220 pcs	
SD-2565	25 x 65	40-45 pcs	
SD-3365	33 x 65	60-75 pcs	
SD-4565	45 x 65	110-120 pcs	
SD-6565	65 x 65	180-200 pcs	
SD-12065	120 x 65	260-350 pcs	
SD-2575	25 x 75	50-55 pcs	
SD-3775	37.5 x 75	110-115 pcs	
SD-5075	50 x 75	180-200 pcs	
SD-7575	75 x 75	200-250 pcs	
SD-10075	100 x 75	260-320 pcs	
SD-12075	120 x 75	280-380 pcs	
SD-15075	150 x 75	335-500 pcs	
SD-2580	25 x 80	60-75 pcs	
SD-4080	40 x 80	120-135 pcs	
SD-6080	60 x 80	180-210 pcs	
SD-8080	80 x 80	240-290 pcs	
SD-10080	100 x 80	260-350 pcs	
SD-12080	120 x 80	300-400 purchase	

ITEM NO.	W x H	WIRES TO BE CONTAINED (2mm <sup>2</sup> )	LENGTH
SD-33100	33 x 100	180-200 pcs	2M
SD-37.5100	37.5 x 100	180-200 pcs	
SD-40100	40 x 100	130-175 pcs	
SD-48100	48 x 100	210-250 pcs	
SD-50100	50 x 100	210-260 pcs	
SD-55100	55 x 100	220-260 pcs	
SD-60100	60 x 100	240-290 pcs	
SD-70100	70 x 100	250-300 pcs	
SD-75100	75 x 100	260-300 pcs	
SD-80100	80 x 100	260-350 pcs	
SD-100100	100 x 100	300-400 pcs	
SD-150100	150 x 100	450-600 pcs	
SD-200100	200 x 100	600-800 pcs	
SD-200150	200 x 150	1040-1200 pcs	
SD-200200	200 x 200	1200-1600 pcs	
SD-300100	300 x 100	1040-1400 pcs	