



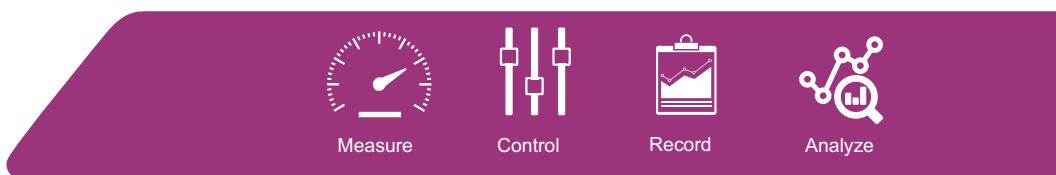

# Power Factor Controller

## RISH PFC 08L

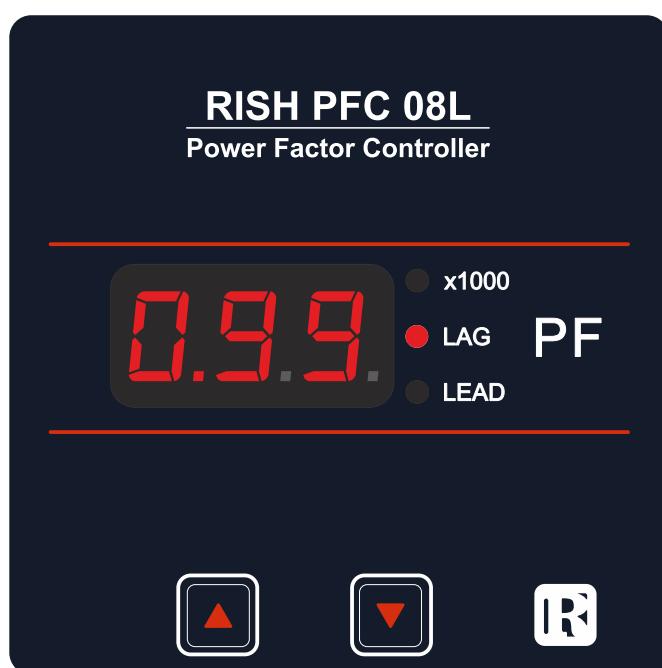

## Characteristics

- Suitable for Inductive Reactive power compensation
- Minimum user intervention by Auto CT polarity correction, Auto bank value detection ,Connected bank count, makes device plug and play
- Versatile capacitor bank input methods
  - Direct capacitor bank value,
  - Control series,
  - Auto capacitor bank value detection
- Low voltage, high voltage, undercurrent fault detection and capacitor protection
- Intelligent bank algorithm for optimum bank switching
- 4 / 6 / 8 relay configuration
- Auto number of bank detection and blocking of non connected banks
- Minimum system settings in auto mode
- User configurable connection ,disconnection, discharge timings



## Features

Display	<ul style="list-style-type: none"> <li>- 3 digit 7 Segment display (digit height 14mm)</li> </ul>
System parameters displayed	<ul style="list-style-type: none"> <li>- Real-time cos phi</li> </ul>

## Technical Data

Weight	0.25 kg
Case	Panel-mounted instrument, 96 × 96 × 35 mm (Back Depth 55mm with add on bank module) (cut out 92 <sup>+0.8</sup> × 92 <sup>+0.8</sup> mm)
Ambient conditions	<ul style="list-style-type: none"> <li>- Over-voltage class III</li> <li>- Pollution degree 2</li> <li>- Operating temperature 0 ... +55 °C</li> <li>- Storage temperature 0 ... +60 °C</li> <li>- Sensitivity to EMC IEC 61326-1:2012, Table 2</li> <li>- Safety guidelines IEC 61010-1:2010</li> <li>- Mounting position Flush Mounting</li> <li>- Humidity class 15% ... 95% non-condensing</li> </ul>
Protection class	<ul style="list-style-type: none"> <li>- Front plate IP50 to IEC60529</li> <li>- Rear side IP20 to IEC60529</li> </ul>



Measure



Control



Record




Analyze

Operation	<ul style="list-style-type: none"> <li>- Auxiliary Supply voltage 80 VAC – 300 VAC</li> <li>- Auxiliary Supply frequency 50-60 Hz</li> <li>- Target cos phi Fixed to 0.99 Inductive</li> <li>- Connection and disconnection times 5...999 seconds</li> <li>- Discharge Time 10...999 seconds</li> <li>- Control modes Self-optimized intelligent control mode</li> </ul>
Measurement	<ul style="list-style-type: none"> <li>- Measurement voltage range 80 ... 300 VAC , 240 V nominal</li> <li>- Fundamental frequency 50-60Hz</li> <li>- Measurement current (CT) 1A / 5A</li> <li>- Minimum operating current 10 mA</li> <li>- Maximum current 6 A (sinusoidal)</li> <li>- Accuracy Power Factor <math>\pm 2^\circ</math></li> </ul>
Switching outputs ( Relay outputs )	<ul style="list-style-type: none"> <li>- Number of outputs 4 / 6 / 8 steps (To be specified while ordering)</li> <li>- Switching voltage/Power Max. 250 VAC / 1000W</li> </ul>



Measure



Control




Record




Analyze

### Connection plan

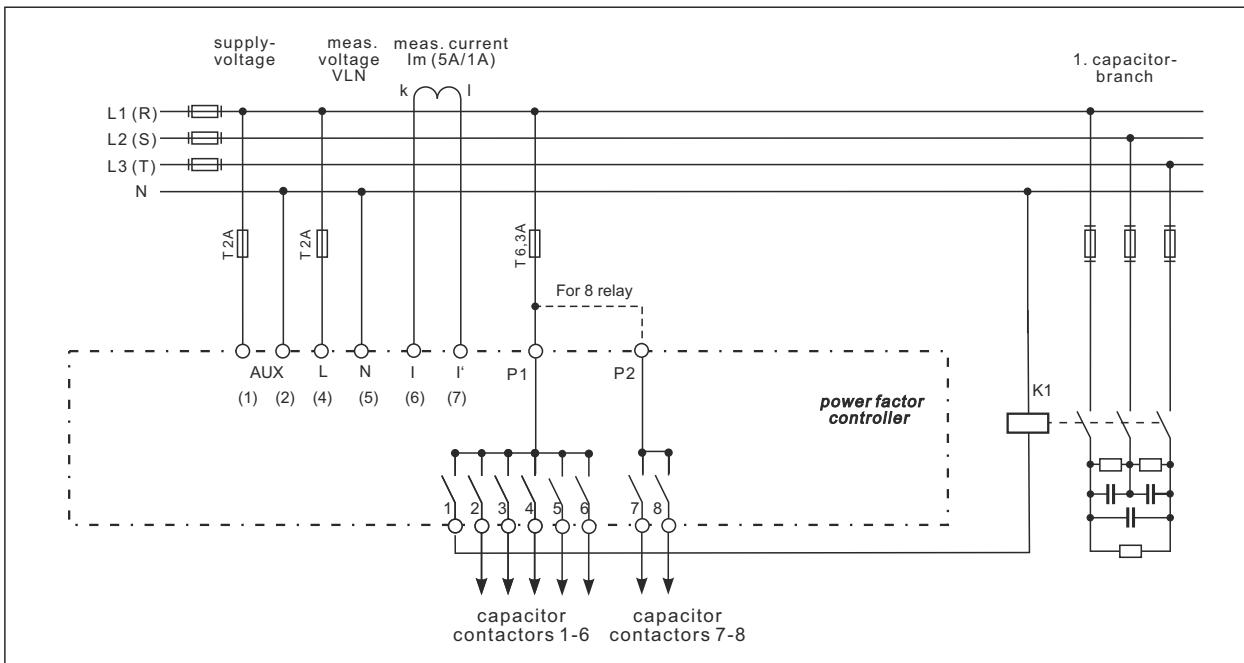

### Dimensions :

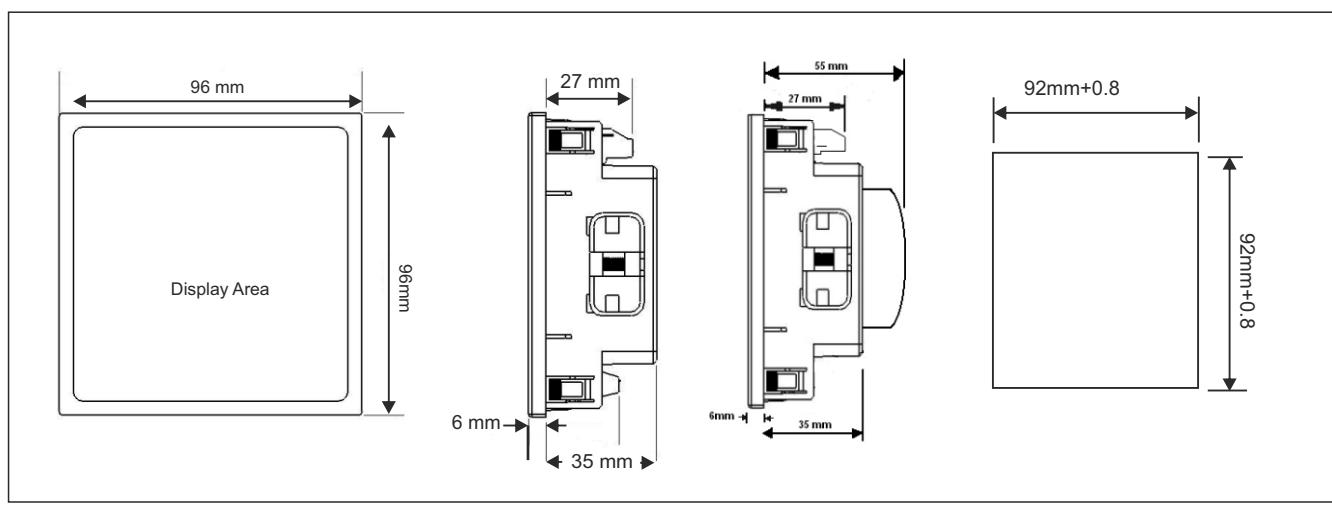


Type - A ( 4 / 6 relays ) Type - B ( 8 relays )

### Optional Accessories

1. Mounting plate 144x144
2. Clamping screws



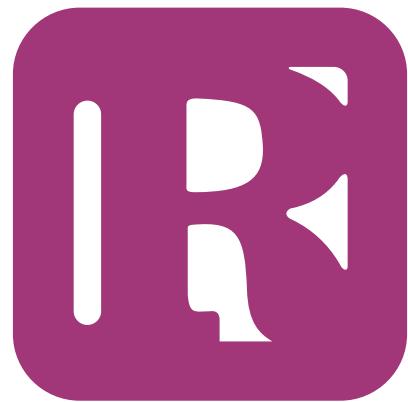

RISHABH



Measure



Control



Record



Analyze

### RISHABH INSTRUMENTS PVT. LTD.

Trishala Unit, C-6, NICE Area, MIDC, Satpur, Nashik - 422007, India.

Tel: +91 253 2202371 / 028 | Fax: +91 253 2351064 | E-mail: marketing@rishabh.co.in | www.rishabh.co.in